


www.leguanlifts.com


## 125 The pioneer

|                                  | LEGUAN 125                          |
|----------------------------------|-------------------------------------|
| SWL                              | 200 kg / 2 persons                  |
| Max. working height              | 11.30 m (200 kg), 12.50 m (<135 kg) |
| Max. platform height             | 9.30 m (200 kg), 10.50 m (<135 kg)  |
| Max. outreach                    | 5.10 m (200 kg), 6.50 m (<135 kg)   |
| Total length                     | 5.16 m                              |
| Platform dimensions W x L        | 1.20 m x 0.70 m                     |
| Slewing                          | 360°                                |
| Gradeability                     | 35% (20°)                           |
| Outrigger spread working         | 2.94 m x 2.89 m                     |
| Max. slope for outriggers        | 22% (I3°)                           |
| Weight with tracks / tyres       | 1650 kg / 1500 kg                   |
| Power source                     | Honda 13 hp petrol                  |
|                                  | 230 V / 110 V                       |
| Drive system: hydraulic          | 4WD                                 |
|                                  | Tracks                              |
| Drive speed max., tracks / tyres | 3.5 km/h / 4.1 km/h                 |

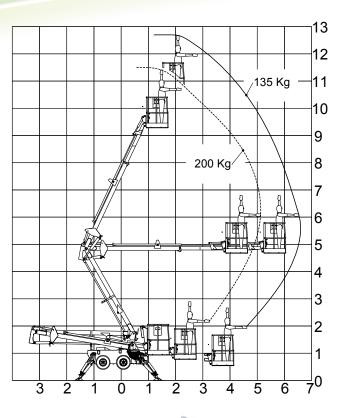


## Options:

- Crawler track chassis
- Non-marking tracks (white)
- Non-marking tyres
- Jockey wheel
- Electric choke for petrol engine at platform level
- 230 V -motor for electric use
- 230 V -outlets in the platform
- Lower controls
- Plastic pads for outrigger plates
- Larger outrigger plates
- Plastic pads for larger outrigger plates
- Anti-skid plates for outrigger plates
- Beacons on the outriggers and boom (5 pcs)
- Booster points (I2 V)
- Hose to platform (compressed air / water / oil)
- Foot pedal in the platform ("Dead man's switch")
- Leguan special trailer TE-HO 2002
- · Safety harness with fast fitting and flexi rope
- GPS-tracking with diagnostics remote shut down and alarm

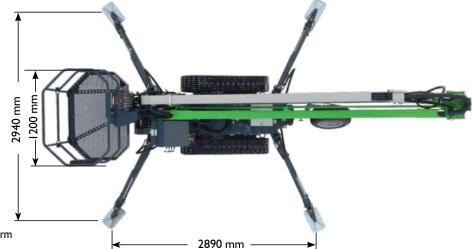



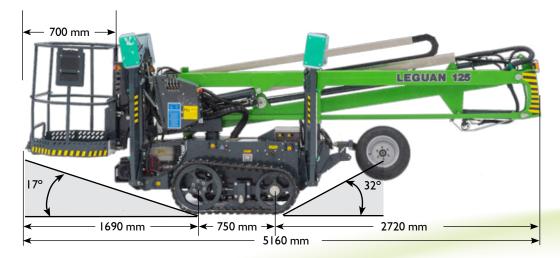



Ylötie 10, FI-33470 Ylöjärvi, Finland Tel. +358 3 347 6400 Fax +358 3 347 6446 leguan@avanttecno.com

Leguan has a policy of continuing improvement, and retains the right to change specifications without notice. © 2019 LEGUAN Lifts Oy. All rights reserved.